

Itaab Stripe

Flourescent fixture T5




Stripe with aluminium louvre




Stripe with opal diffuser



Quick-coupling system
Wieland Mini







Suspension wire fastener



Mounting bracket
(adds 20mm to height)



Quick-coupling cables
Wieland Mini

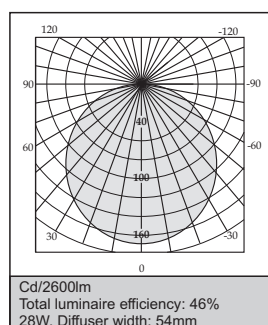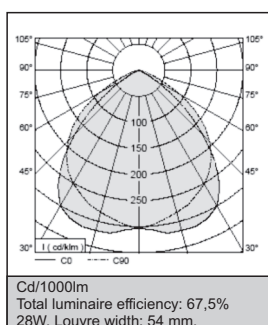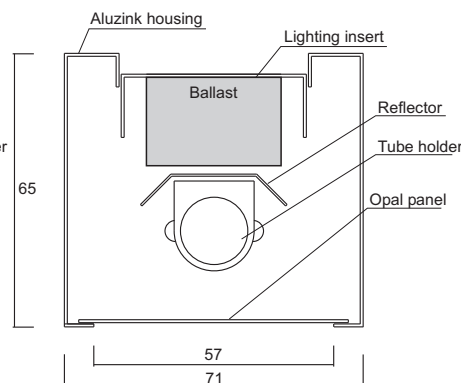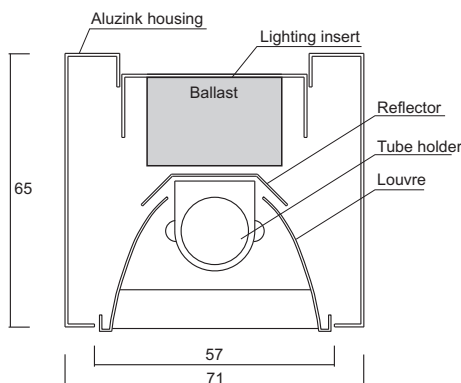

Article no.	Model	Wattage [W]	Length [mm]	Width [mm]	Height [mm]	Weight [kg]	Qty./ carton
ST1-21	Itaab Stripe T5 21W HF	21	895	70	65	1,4	1
ST1-28	Itaab Stripe T5 28W HF	28	1195	70	65	1,9	1
ST1-35	Itaab Stripe T5 35W HF	35	1495	70	65	2,3	1

Dimensions and specifications are subject to change without notification.

Specifications:

Flourescent fixture T5

For inset or pendant mounting.

Design:

Housing and frame manufactured of white or silver lacquered aluzink. High polished aluminium louvre or High Transmission opal diffuser. Halogen-free cable.

Mounting/ Installation:

Suitable for mounting on Itaab profile, other supporting surface or as pendant.

Two mounting brackets included.

Connect to 220-240V, 50-60Hz mains using white, 2.5m/3x0.75mm² power cord (included), or wire directly to 3/5-pole terminal block on fixture. Optional Wieland Mini quick-coupling system available as accessory.

Dimming:

Analogue 1-10V, phase control (impulse), DALI.

Accessories:

T5 lamps
Quick-coupling system Wieland Mini
3/5-pole start cable Wieland Mini
3/5-pole extension cable Wieland Mini
Suspension wire with fastener
Mounting bracket 20mm (included)

CE F IP20



Box 1211
S-701 12 Örebro
Sweden
Tel: +46 19- 22 51 90
Fax: +46 19- 22 56 44
info@itaab.com
www.itaab.com